


S-LINK Output

6 S-LINK Inputs
3 on top, 3 on the back

JTAG Via RS485
(Optional)

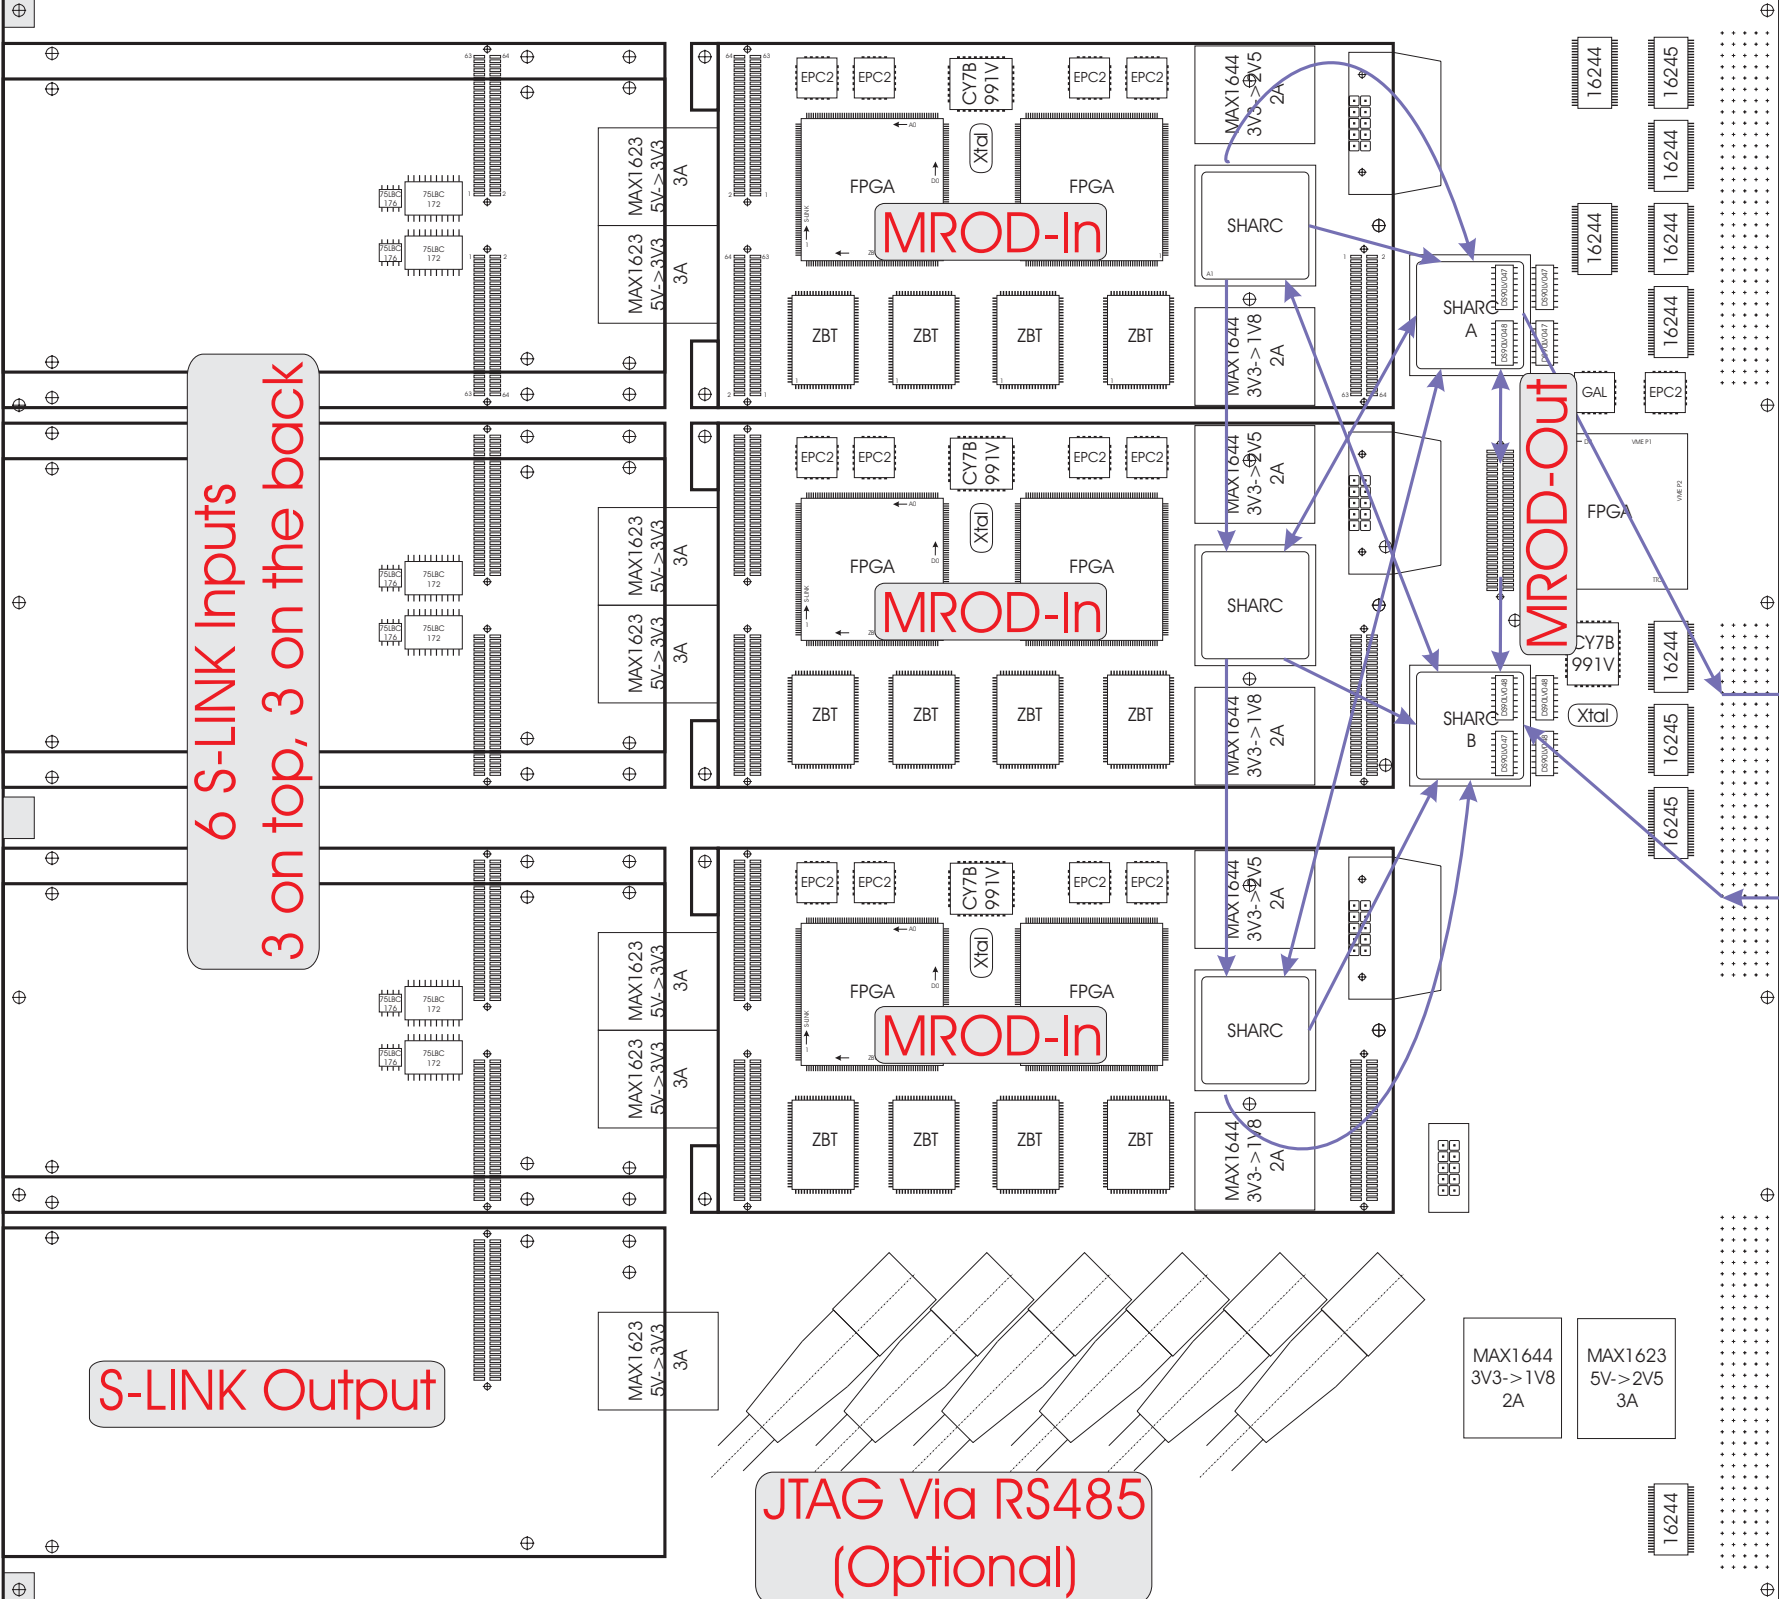

TTC Information
via P3

VME64x Interface

SHARC-Link
LVDS in

SHARC-Link
LVDS out